

Type : 2MS080M4C-PD-M8-000**Date** : 05/12/2024

Power [kW]	: 0.55	Efficiency Class	: IE2
Input Voltage [V]	: 230	Duty Cycle	: S1
Frequency [Hz]	: 50	Service Factor	: 1.00
Pole Number	: 4	Frame Size	: 080M
Nominal Speed [rpm]	: 1415	Weight [kg]	: 10.8
Nominal Current [A]	: 3.20	Insulation Class	: F [155°C]
Nominal Moment [Nm]	: 3.71	Temperature Rise	: B [80°K]
Nominal Efficiency [η]	: 77.1	Protection Class	: IP55
Power Factor [cosφ]	: 0.97	Vibration Severity Grade	: A
Locked Rotor Current [Ia/In]	: 4.60	Method of Cooling	: IC411 (TEFC)
Locked Rotor Torque [Mk/Mn]	: 2.60	Direction of Rotation	: Bidirectional
Breakdown Torque [Mk/Mn]	: 2.00	Balance	: Half Key
Run Capacitor Capacity [μF]	: 30	Motor Thermal Protection	: --
Run Capacitor Voltage [V]	: 400	Altitude Above Sea Level	: 1000m
Start Capacitor Capacity [μF]	: 64-77	Motor Color	: RAL 7031
Start Capacitor Voltage [V]	: 330	Ambient Temperature	: -15°C / +40°C

ELECTRICAL DATA

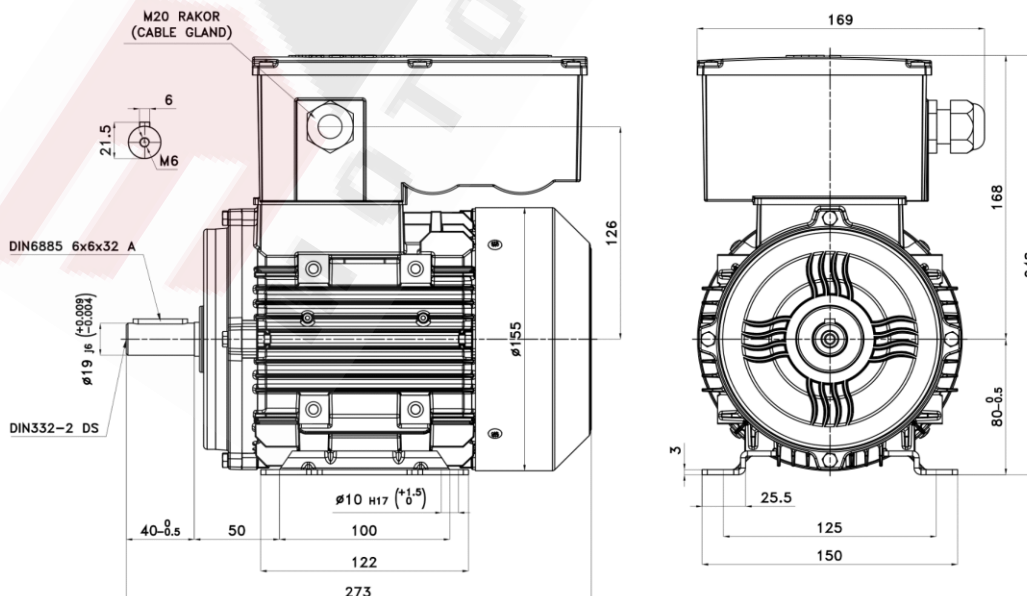
U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	Cosφ	η [%100]	η [%75]	η [%50]	Cl
230	50	0.55	1415	3.20	0.97	77.1	72.0	63.1	IE2

MECHANICAL DATA

Moment of Inertia [kgm ²]	: 0.00184
Bearing DS / NS	: 6204ZZ C3 / 6204ZZ C3
Frame Material	: Aluminum
Flange Type / Material	: B3 / Aluminum
Cooling Fan Material	: Plastic
End Shield Material	: Aluminum

TERMINAL BOX

Terminal Box Material	: Aluminum
Cable Gland Direction	: Right
Terminal Box Position	: Top
Terminal Box Cable Entry	: M20x1.5
Terminal Box Blind Cap	: M16x1.5
Contact Screw Thread	: M4

MECHANICAL DIMENSIONS

Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV. NO: 03 REV TARİHİ : 01.01.2021

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.